



PT. SURYA UTAMA TEKNOLOGI

DEM[®]
DEMAC
T50




DEMAC T50 | THERMAL TRANSFER OVER PRINTER

Represent an advanced coding solution that can meet personalized and diversified demands from customers in various industries, such as food, medicine, daily chemical, seeds, veterinary drugs, pesticides, household paper, finance, etc.

INTERMITTENT / CONTINUOUS COMBINED

Customers can independently choose the corresponding working mode according to the change of production line, so as to realize the reuse of one coding machine and save cost.

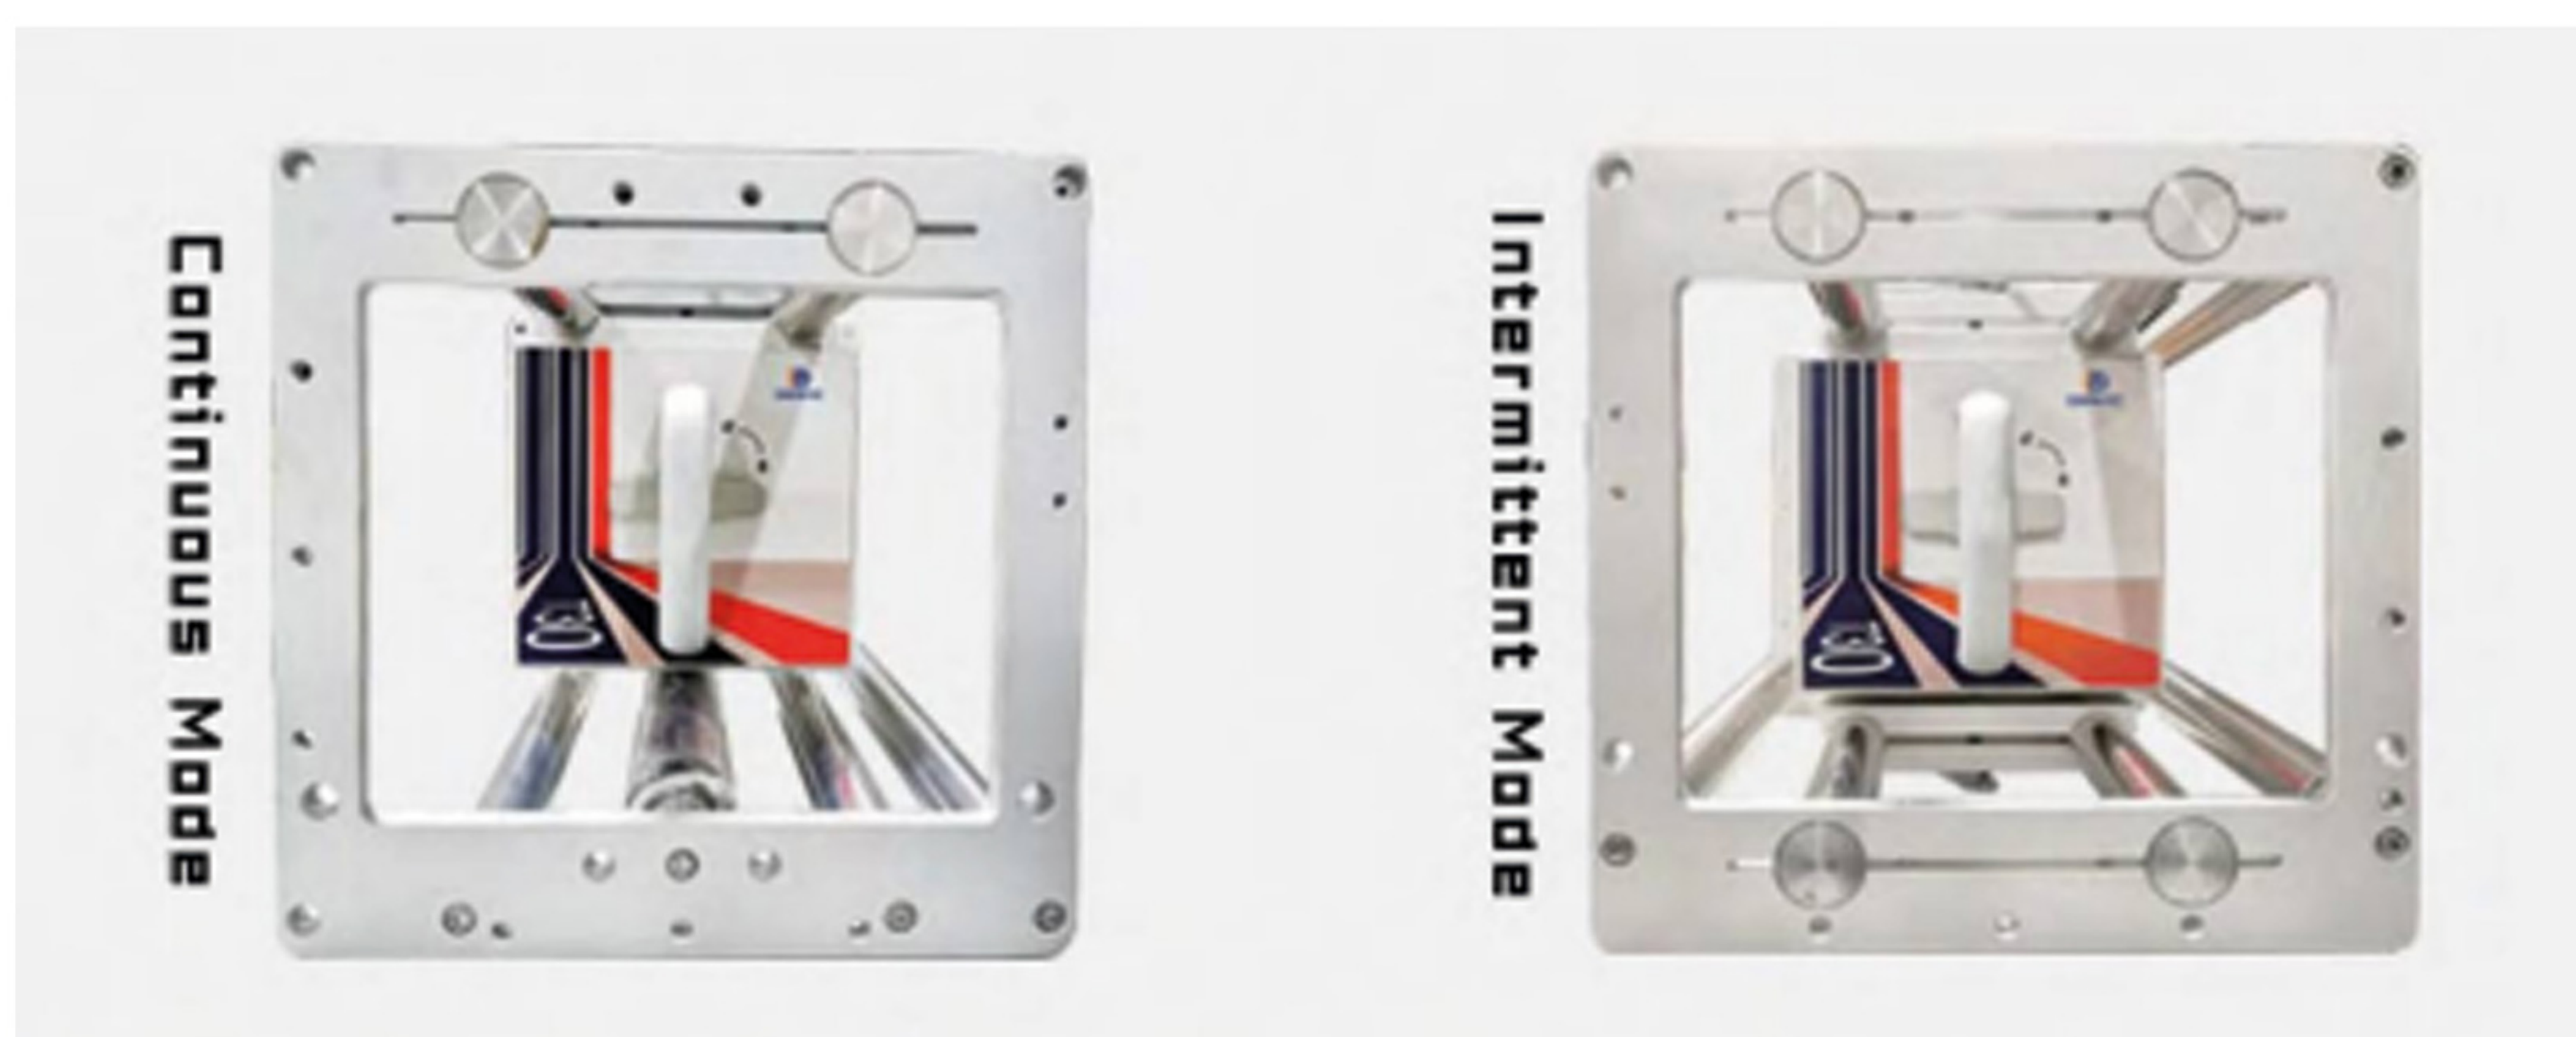

EXCELLENT QUALITY PRINTS

Customers can independently choose the corresponding working mode according to the change of production line, so as to realize the reuse of one coding machine and save cost.



- ✓ 300DPI High-Quality Prints
- ✓ Up to 90mm(intermittent) and 150mm (continuous) Ultra Length prints
- ✓ • Speed up to 300 times/min (intermittent) and 380 times/min (continuous)
- ✓ Flexible Print Text -- real time, dates, variable data, bar codes, QR codes, Logo, graphics, tables, etc

- ✓ Easy-to-use Design Software -- all the contents can be edit and per fectly printed
- ✓ Support to edit and print all languages like English, Spanish, Arabic, Iranian, Japanese, Korean etc; support Persian calendar and Islamic calendar; Support international GSI code.

SIMPLE OPERATION


Hot-swap Touch Pad, can be removed to control others after the device works normally, realizing one-to-many control and greatly reducing the risk of device failure.



COST ADVANTAGES

Optimized Ribbon usage, 0,1mm gap between prints. Ribbon saving features help to minimize reduce Ribbon consumption and waste. Low cost accessories, greatly reduce maintenance cost.

REMOTE CONTROL

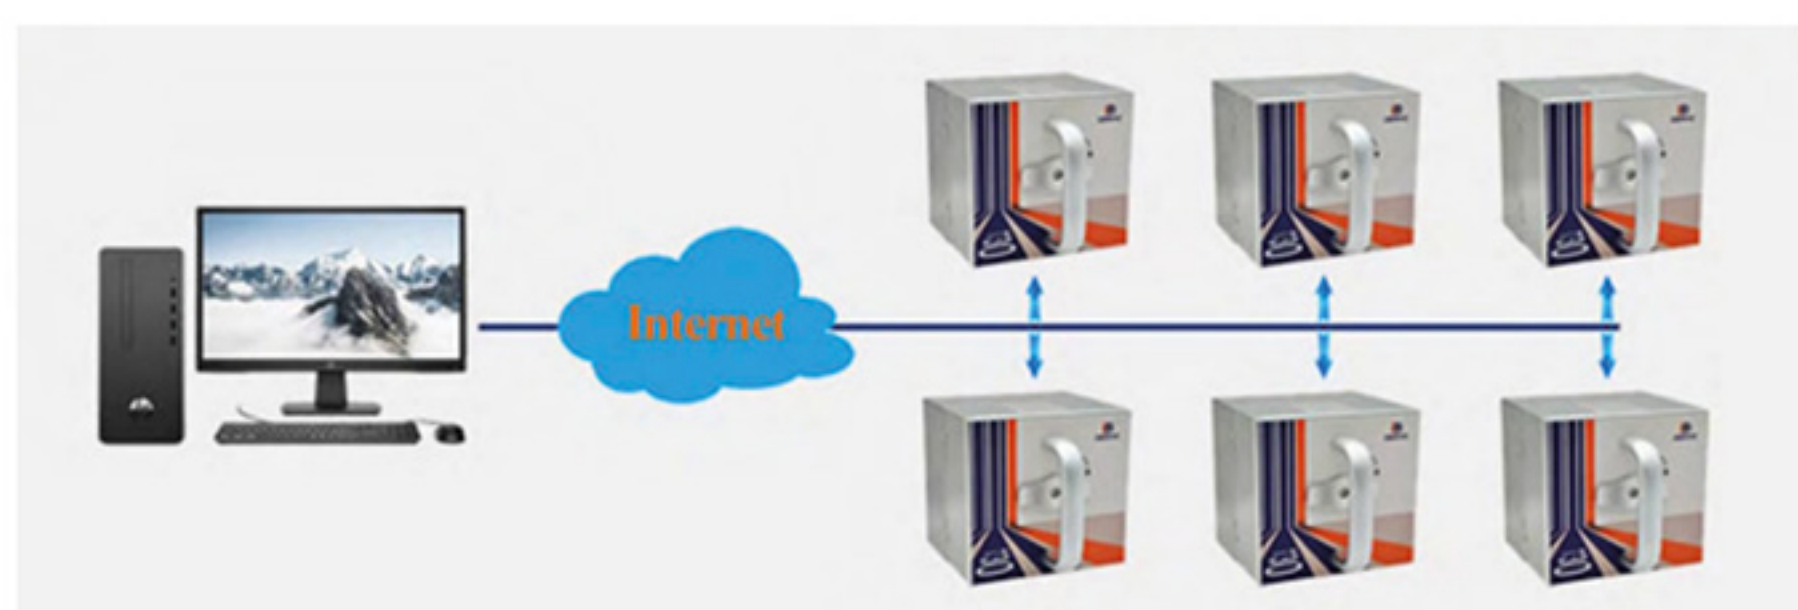

PC control system is specially designed for one computer to remotely manage six printers at the same time, and realize contactless starting/stopping, changing print jobs, setting equipmentparameters, monitoring equipment status and other routine operations.

SPEISIFICATION

Model	T30		T50	
	Intermittent	Continuous	Intermittent	Continuous
Printhead	32mm, 300 DPI		53mm, 300 DPI	
Print Area	32mm x 75mm	32mm x 150mm	53mm x 90mm	53mm x 150mm
Print Speed	≤ 30 m/min	≤ 43 m/min	≤ 30 m/min	≤ 43 m/min
Frequency	≤ 300 times/min	≤ 380 times/min	≤ 300 times/min	≤ 380 times/min
Print Job	Real Time, Date, Variable Data, Automatic Shift Code, Serial Number, Logos, Barcodes, QR Codes, Nutrition Tables, etc.			
Bar code	Code128(Support GS1 Mode), EANX, Code11, QR code(Support GS1 Mode), C25matrix, C25inter, C25iata, UPC-A, UPC-E, EAN128, PDF417, DataMatrix(Support GS1 Mode), etc.			
PC Control System	Include all features of the Touch Pad interface, support promotional codes, unique random codes, manage max. 6 printer units meantime, provide communications protocols.			
More Features	Ribbon saving mode; Automatic repeat print; Printing saving mode (support combination)			
Languages	Simplified Chinese, English, Traditional Chinese, Spanish, Portuguese, French, Arabic, German, Russian, Italian, etc.			
Touch Pad	Support Hot-swap			
COM Interface	USB, TCP/IP			
Max Ribbon Len	500m		600m	
Ribbon Width	22mm ~ 33mm		33mm ~ 55mm	
Power Supply	AV110~240V 50/60Hz			
Power	200 W			
Dimension(L*W*H)	190mm*180mm*170mm		210mm*180mm*190mm	
	Handheld Touch Pad: 220mm*120mm*30mm			
Weight	Print Unit: 7.5kg, Touch Pad: 0.85kg		Print Unit: 8.0kg, Touch Pad: 0.85kg	
Working Env.	Temperature: 0-40°C; Relative humidity: 10-90% (Non-condensing)			
Air Supply	0.35~0.6Mpa, Dry and Clean			



PT. SURYA UTAMA TEKNOLOGI

-- CODING, MARKING & LABELING --



[HTTPS://SUT-INDONESIA.COM/](https://sut-indonesia.com/)



PTSURYAUTAMATEKNOLOGI@GMAIL.COM



KOMPLEK PERGUDANGAN BIZPOINT BLOK R6 NO.9



CONTACT US : +62 852 801 721 18